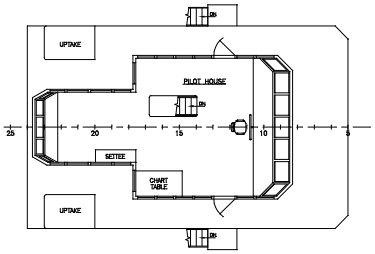

BRIDGE DECK

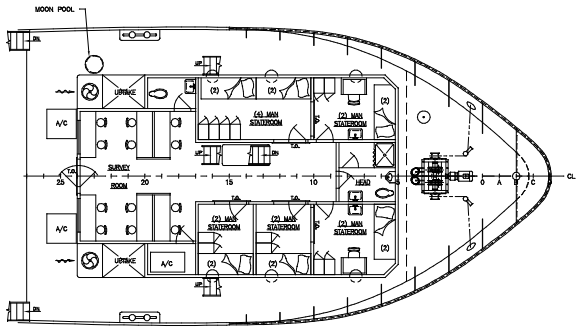

FOCSLE DECK

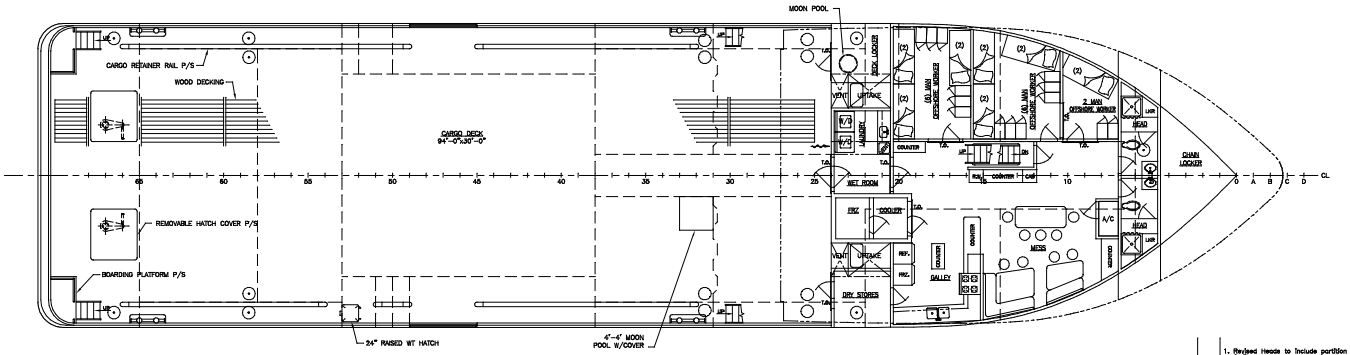

MAIN DECK

REV.	DESCRIPTION	DATE	BY
1	1. Revised heads to include partition between WC & Shower. 2. Relocated A/C & counter in Mess. 3. Revised retainer rail & gate. 4. Extended bridge deck aft of stack.	7/18/02	CB

REVISIONS

MASTER BOAT BUILDERS, INC.

P.O. Box 702 Bayou LaBatre, AL. 36509

150'-0" x 36'-0" x 12'-0"

OSV

Drawn By = C. BRAUN	Approved By =	Scale = 3/16"=1'-0"
Hull No. 354		Date = 5-8-02

GENERAL ARRANGEMENT

Sheet = 1 of 1	Drawing Number = A-3	Rev. 1
Contract No.		

computer detailing by CenCAD Computer Drafting Services, WAVELAND, MS - (228)826-3016

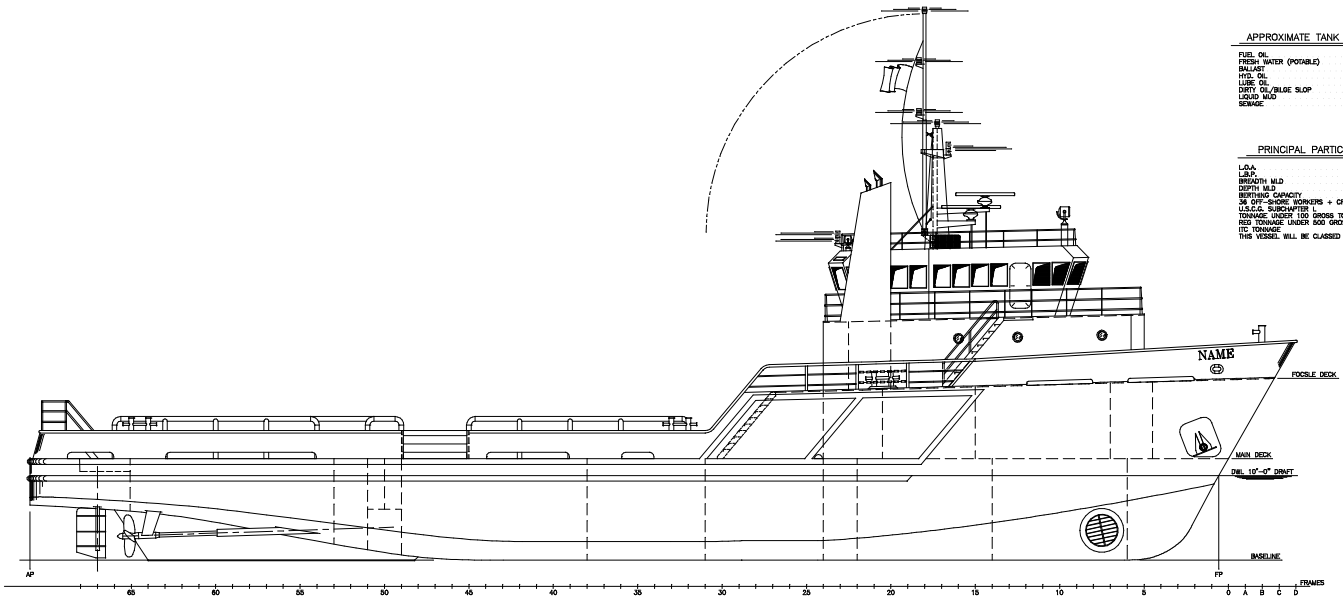

OUTBOARD PROFILE

APPROXIMATE TANK CAPACITIES

FUEL OIL	45,500 USG
FRESH WATER (POTABLE)	18,800 USG
BALLAST	92,500 USG
HYD. OIL	435 USG
LUBE OIL	1,275 USG
DIRTY OIL/BILGE SLOP	1,300 USG
LIQUID MUD	984 BBLS (30,700 USG)
SEWAGE	3,700 USG

PRINCIPAL PARTICULARS

L.O.A.	150'-0"
L.B.P.	140'-10 3/8"
BREADTH MLD	36'-0"
DEPTH MLD	12'-0"
BERTHING CAPACITY	26 MEN
36 OFF-SHORE WORKERS + CREW	
U.S.C.G. SUBCHAPTER L	
TONNAGE UNDER 100 GROSS TONS	
REG TONNAGE UNDER 500 GROSS TONS	
ITC TONNAGE	
THIS VESSEL WILL BE CLASSED ABS MALTESE CROSS A1, AMS	

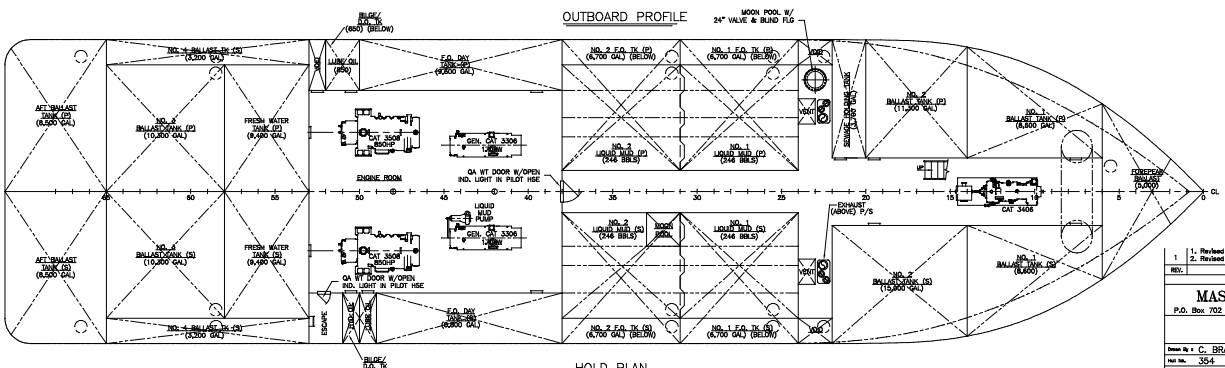

HOLD PLAN

REV.	DESCRIPTION	DATE	BY
1	1. Revised freeing ports, retainer rail & gate. 2. Revised blocks & Side light locations.	7/18/02 8/19/02	CB

REVISIONS

MASTER BOAT BUILDERS, INC.

P.O. Box 702 Bayou LaBatre, AL. 36509

150'-0" x 36'-0" x 12'-0"

OSV

Drawn By = C. BRAUN	Approved By =	Scale = 3/16"=1'-0"
Hull No. 354		Date = 5-24-02

OUTBD PROFILE/HOLD PLAN

Sheet = 1 of 1	Drawing Number = A-2	Rev. 1
Contract No.		

computer detailing by CenCAD Computer Drafting Services, WAVELAND, MS - (228)826-3016